



Albacel® Softwood Pulp Albacel® 长纤木浆

Albacel® Softwood Pulp is a high brightness, ECF bleached, predominantly loblolly pine kraft pulp manufactured at International Paper's Riegelwood Mill.


Albacel® 长纤木浆是高白度, 无氯元素漂白, 主要由火炬松经硫酸盐法制浆而成的, 生产于国际纸业 Riegelwood 工厂。

Typical Characteristics 特性

Pulp Properties 长纤木浆分析

Brightness, 白度 % ISO	88
Viscosity, 粘度 cps	14
Air Dry, 风干率 %	97.2
Dirt, 尘埃度 ppm	≤3

Softwood Pulp Analysis 木浆性质

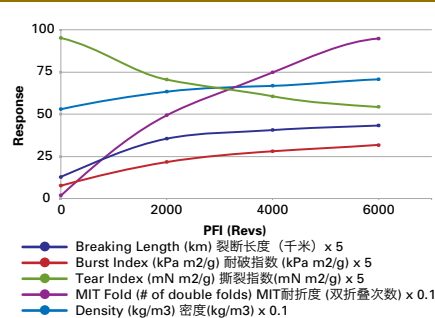

Physical Properties – PFI Refiner 物理性质 – PFI 磨浆机

PFI Revolutions PFI 转数	0	2000	4000	6000
CSF (mL) 加拿大游离度	705	588	464	349
Schopper-Riegler 肖伯 - 黎格勒数	15	20	27	36
Breaking Length (m) 裂断长度	2380	6370	7340	7940
Burst Index (kPa*m ² /g) 耐破指数	1.4	4.5	5.3	5.6
Tear Index (nM*m ² /g) 撕裂指数	18.4	14.1	12.0	10.9
Printing Opacity (%) 印刷不透明度	71	61	59	57
Bulk (cc/g) 松厚度	1.87	1.54	1.45	1.42
Fold Endurance (MIT) 耐折度	14	494	754	906

Bale Characteristics 板浆参数 Roll Characteristics 浆卷参数

Length 长度	32 in / 81 cm	Diameter 直径	49, 55, 59 in (124, 140, 150 cm)
Width 宽度	32 in / 81 cm	Weight 重量	2000 to 5000 lb (907 to 2267 kg)
Height 高度	17 in / 43 cm	Width 宽度	trim rolls to maximize machine width of 260 in (660.4 cm)
Weight 重量	560 lb / 254 kg		浆卷切边最大化机器 宽度 660.4 厘米

The data represented here is typical and is based on long term averages. The data is not intended to be used as a specification and should not be regarded as such.

此份技术数据为典型目标值基于长期测试平均值, 并非物理性质技术参数且不可用作技术参数。

©2013 International Paper Company. All rights reserved. Albacel is a registered trademark of International Paper Company. Forest Stewardship Council, FSC and the FSC logo are trademarks of Forest Stewardship Council, A.C. PEFC and the PEFC logo are registered trademarks of the PEFC Council. Sustainable Forestry Initiative, SFI and the SFI logo are registered marks owned by Sustainable Forestry Initiative Inc. 05/13

©2013 国际纸业。版权所有。Albacel 为国际纸业注册商标。森林管理委员会, FSC 和 FSC 标识为森林管理委员会商标。A.C. PEFC 及 PEFC 标识为 PEFC 委员会注册商标。可持续林业倡议, SFI 和 SFI 标识为美国可持续林业倡议公司注册商标。05/13

Pulp Business

木浆业务

Riegelwood


Technical Data Sheet

技术数据

Attributes 特点

- Elemental chlorine free (ECF) bleaching sequence
无氯元素漂白
- REACH compliant
产品符合欧盟 REACH 标准
- FDA Compliant (21 CFR 176.170, 176.180 and 186.1673)
产品符合美国 FDA 标准 (21 CRW 176.170, 176.180 and 186.1673)
- BfR Compliant (XXXVI)
产品符合 BfR 标准

Wood Species 树种



100% Loblolly 火炬松



The mark of responsible forestry



Albacel® Softwood Pulp is SFI® certified. Albacel® 长纤木浆拥有美国 SFI® 认证。

The Riegelwood mill is certified to FSC®, PEFC and SFI® Chain-of-Custody standards. Riegelwood 工厂认证于 FSC®, PEFC 以及 SFI® 产销监管链标准。